



HA-9232



-  H.264
-  5 Pentaplex
-  HDMI
-  USB
-  PTZ
-  FREE DDNS
-  CMS
-  Internet

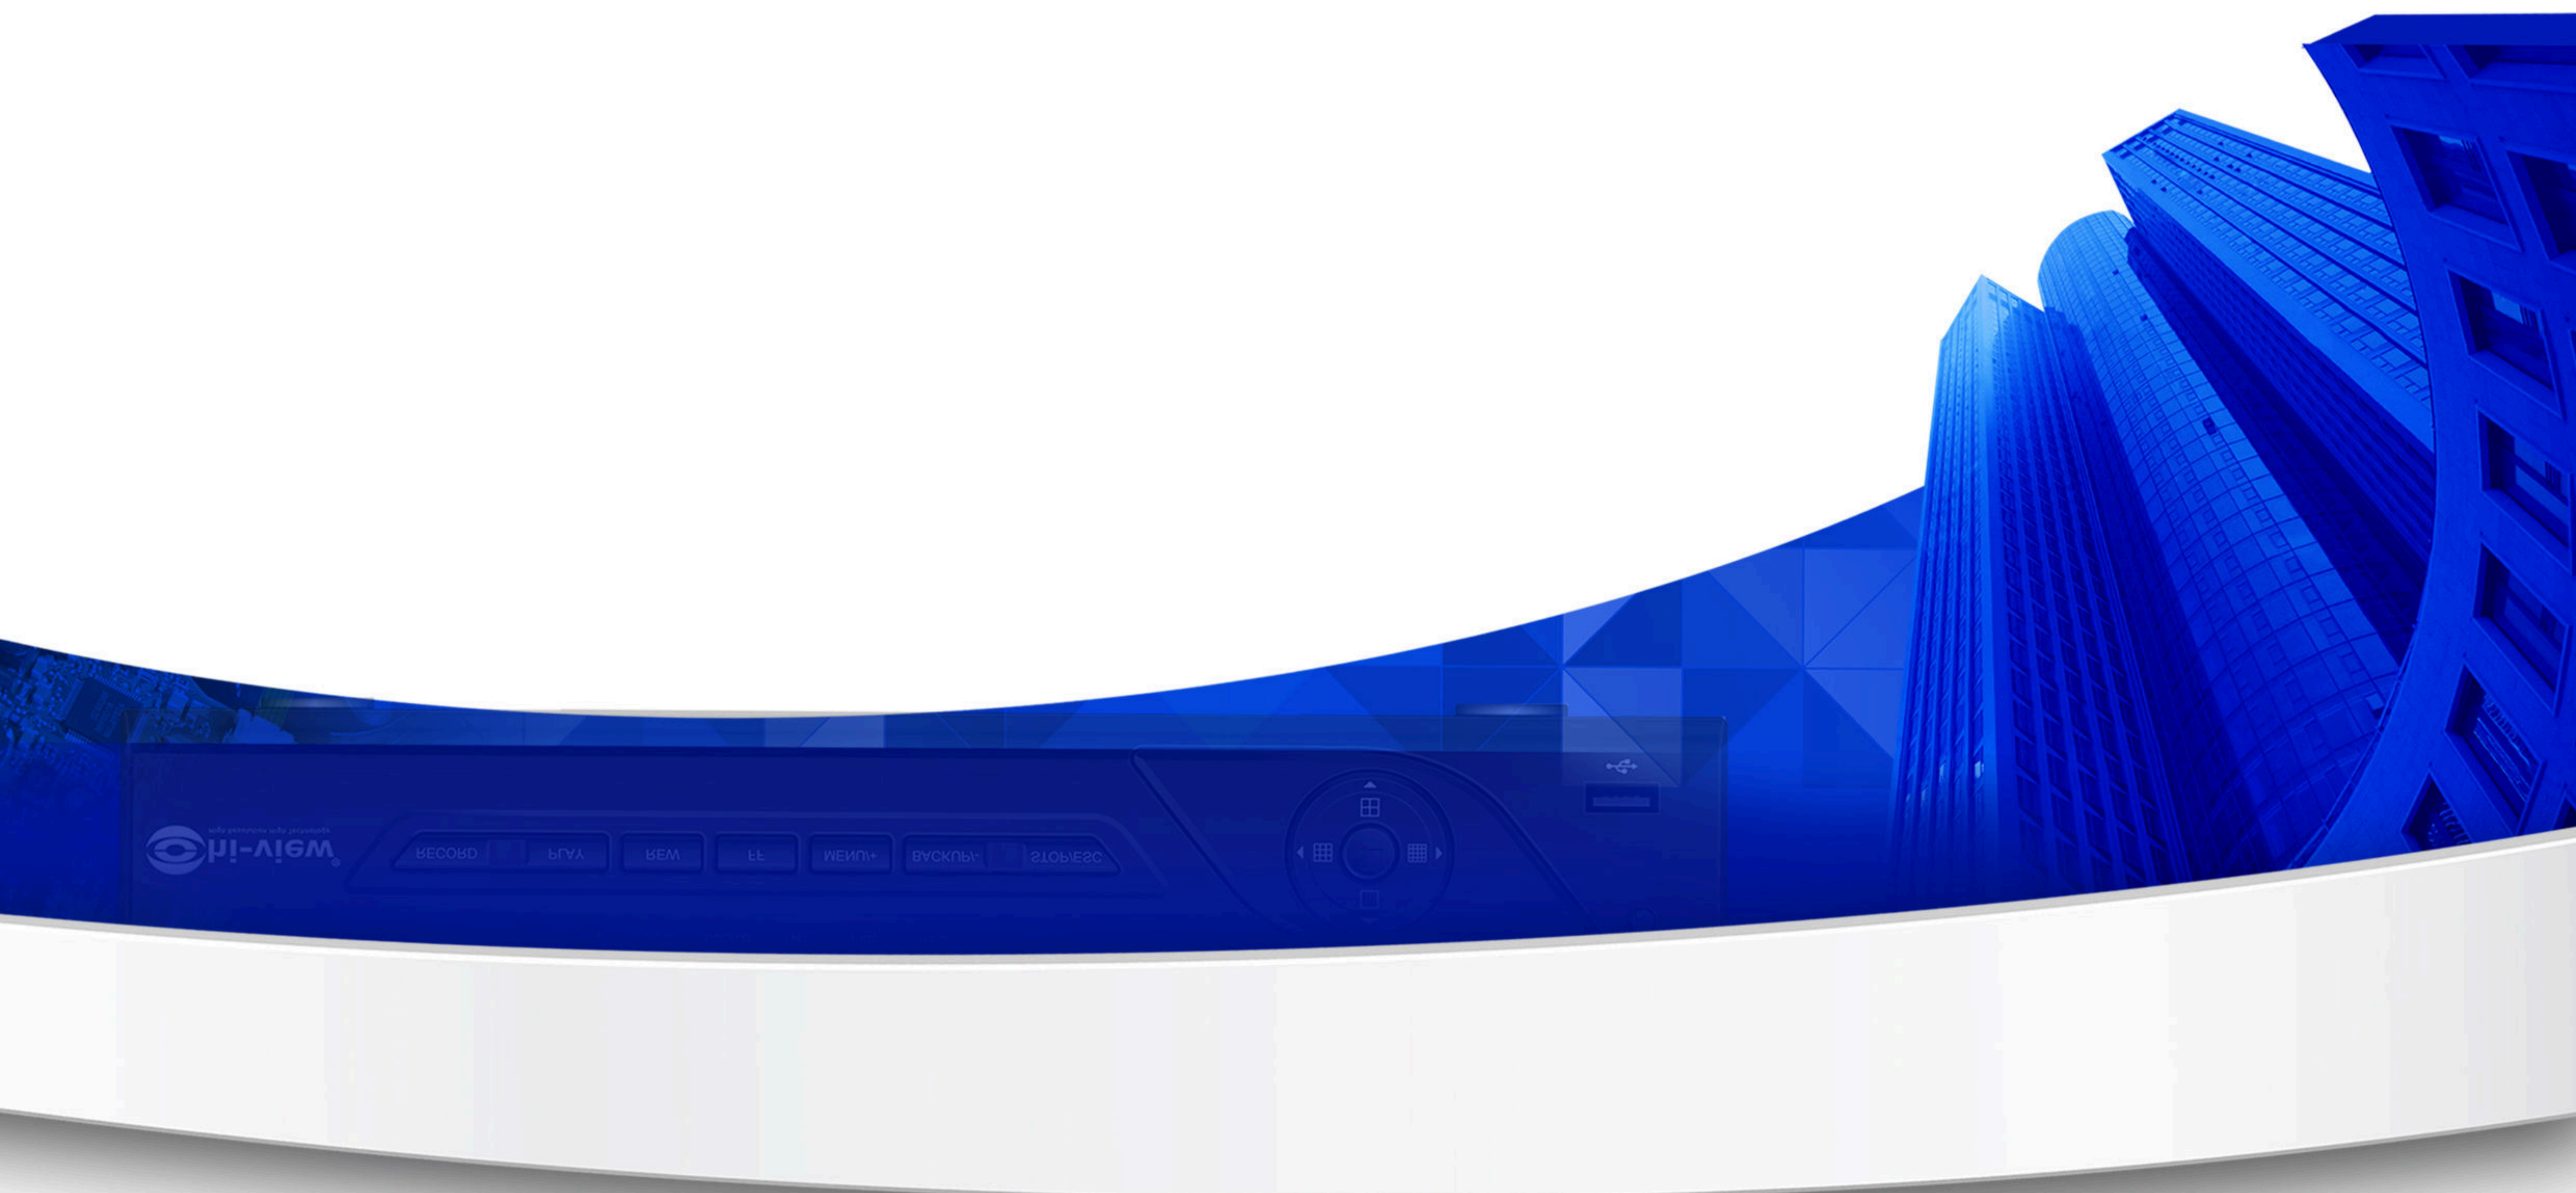


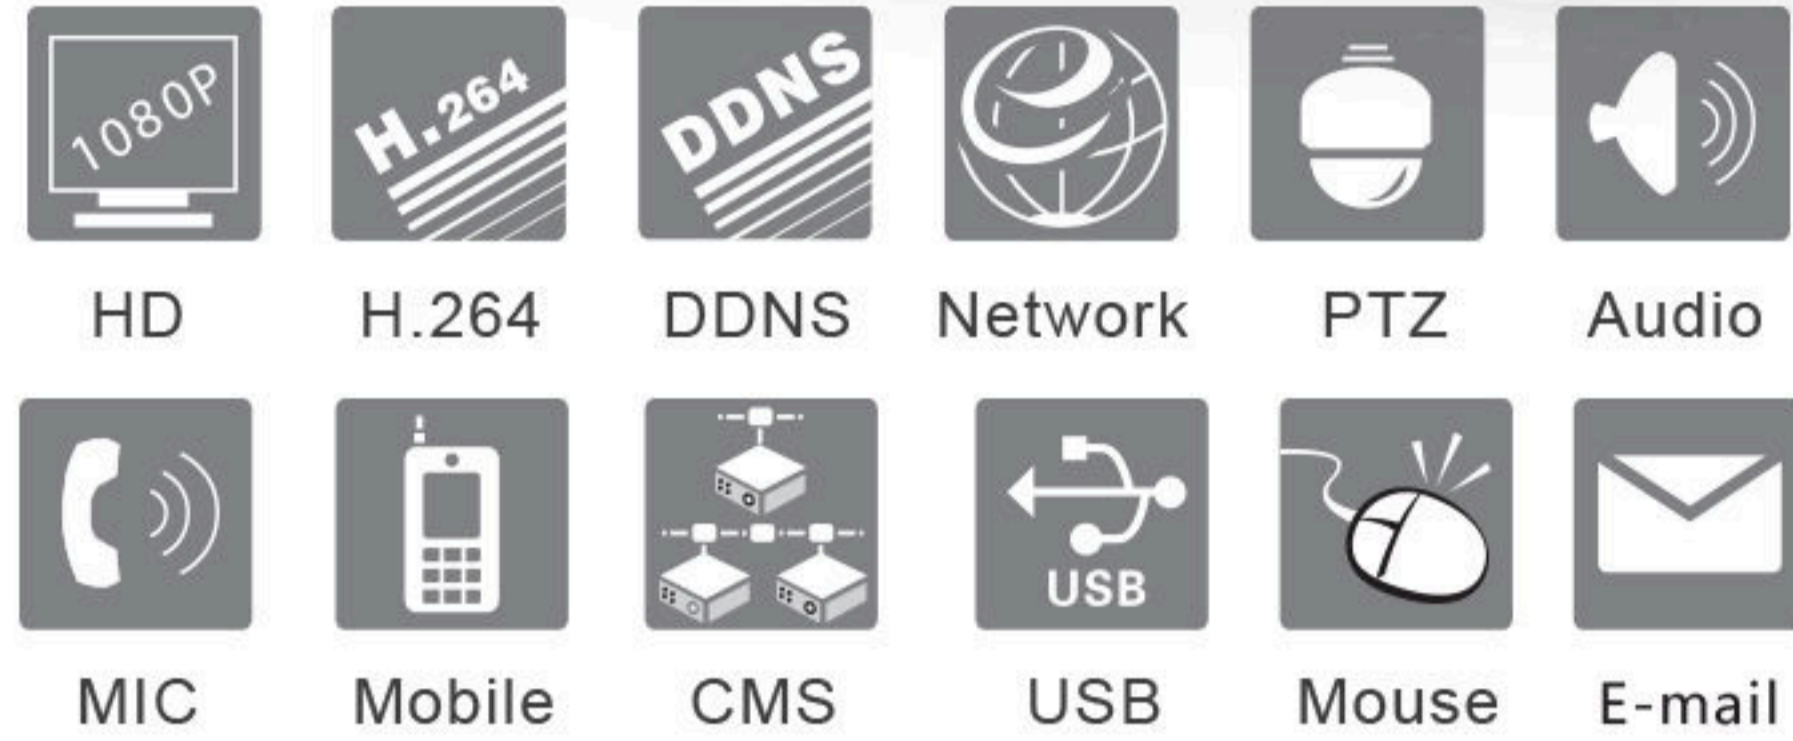

Feature

- 32 CH HD video input, 1080P / 720P / WD1 recording
- Playback: 8 CH simultaneously playback
- Search: time / calendar, events (alarm, motion)
- Express and flexible backup via USB and network and so on
- Pentaplex : preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE Network protocol, IE browse and CMS supported
- Remote control via IE or CMS: preview, playback, backup, PTZ and configuration
- HDMI 1080P output, true high resolution display
- Support PTZ preset and auto cruise, up to 128 presets and 8 cruises
- Powerful smart phone surveillance supporting iPhone, Andriod

Dimension

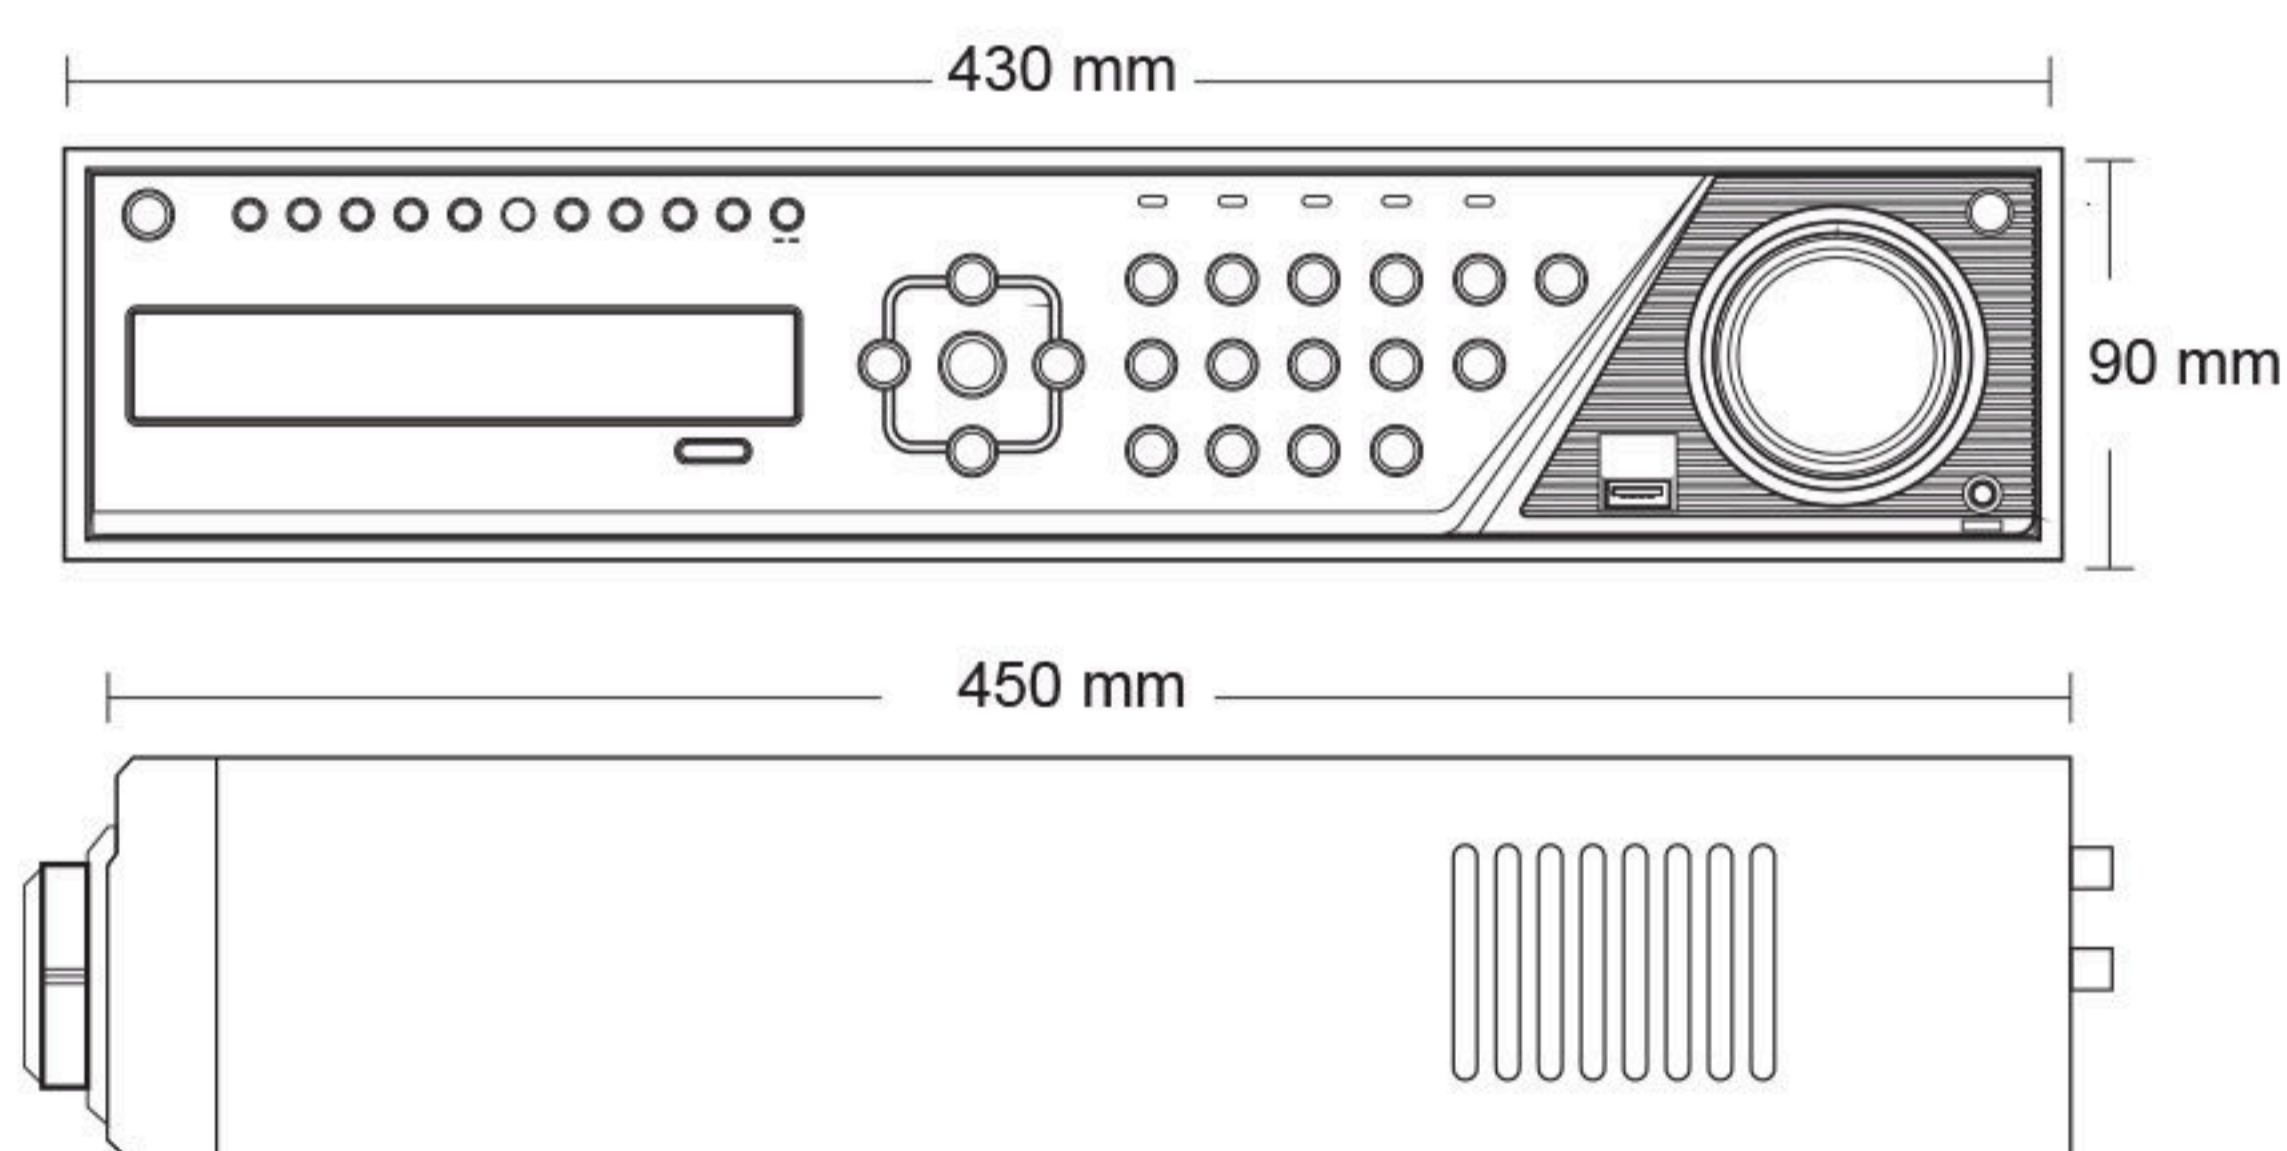

Specification

Model		HA-9232	
System	Compression	Standard H.264 High Profile	
	CPU	Cortex A9	
	OS	Embedded Linux	
Video	Input	BNC x 32 Support TVI 1080P@25/30fps, 720P@25/30/50/60fps and AHD 1080P@25/30fps, 720P@25/30fps, WD1 input	
	Output	HDMI x 1 : 1920 x 1080 VGA x1 : 1920 x 1080	
Audio	Input	RCA x 16	
	Output	RCA x 1	
	2-way audio	RCA x 1	
Record	Resolution	1080P : 1920x1080, 720P : 1280x720, WD1	
	Frame Rate	720P/WD1	800 fps (PAL) / 960 fps (NTSC)
		1080P	400 fps (PAL) / 480 fps (NTSC)
	Bit rate	768Kbps ~ 8Mbps	
	Encode	VBR / CBR	
	Quality	6 Level	
	Mode	Manual, timer, motion, sensor	
	File manager	Lock, Unlock	
Play back	Playback	8 CH	
	Search	Time/calendar search, event (motion, external alarm)	
	Smart search	Highlighted date and time to display the channel record	
	Function	Play, pause, FF, FB, digital zoom	
Alarm	Mode	Sensor, motion, video loss	
	Input	16 CH	
	Output	4 CH	
Network	Triggering	Record, PTZ move, alarm out, e-mail, etc	
	Interface	RJ45 10M / 100M / 1000M x 1	
	Protocal	TCP / IP, UDP, DHCP, DNS, PPPOE, DDNS	
Cell phone	Other	Up to 10 online users, dual stream	
	OS	iPhone, Andriod	
I/O	Function	Multi-screen surveillance (for certain model), record, snapshot, PTZ control, save the device list	
	HDD	SATA x 8, e-SATA x 2	
	RS485	RS485 x 2, one for PTZ, another for keyboard	
	USB	USB2.0x2, one for mouse, another for USBbackup device	
Other	IR controller	Yes	
	Power supply	ATX	
	Consumption	< 40W (without HDD)	
	Dimension (mm)	430 x 450 x 90 (W x D x H)	
	Work Environment	-10°C ~ 50°C ,10% ~ 90 % Humidity	