


IP CAMERA SERIES 88SERIES





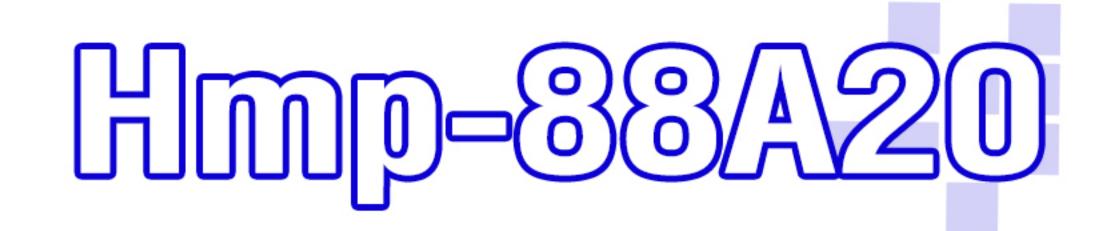

Specification















Feature

- High resolution, image presented vivid and clear.
- Support automatic color change/IR-CUT, achieving day and night non-stop monitoring.
- Support various information superimposed (such as, ID, IP, DDNS and so on) convenient to operate
- Introduce advanced H.264 HP video compression, achieving ultra-low bit-rate, superb high-definition picture quality.
- Support dual-stream
- support various mobile long-distance monitoring, iPhone, Windows Mobile, BlackBerry, Symbian, Android
- Support multiple web browsers, IE, Chrome, Firefox, Safari
- support auto electronic shutter, adapt to different monitoring environment
- web and CMS supporting, central management software MYEYE, providing SDK development.
- support HVR/NVR connection, conform to ONVIF

Camera Image sensor 1/2.8" Sony IMX222 CMOS Min.illumination Color 0.1Lux @(F1.2,AGC ON),0 LUX with IR B/W 0.01 Lux @(F1.2,AGC ON),0 LUX with IR Shutter 1/50(1/60)s to 1/10,000 s Lens HD Professional CS Lens 4mm.,6mm./F1.8 Lens mount CS Day/night Support IR-CUT Compression Video compression H.264 HighProfile, JPEG snapshot Bite rate 32 Kbps~8Mbps Audio compression G.711a
Image sensor Min.illumination Color 0.1Lux @(F1.2,AGC ON),0 LUX with IR B/W 0.01 Lux @(F1.2,AGC ON),0 LUX with IR Shutter 1/50(1/60)s to 1/10,000 s Lens HD Professional CS Lens 4mm.,6mm./F1.8 Lens mount CS Day/night Support IR-CUT Compression Video compression H.264 HighProfile, JPEG snapshot Bite rate 32 Kbps~8Mbps
Min.illumination Color 0.1Lux @(F1.2,AGC ON),0 LUX with IR B/W 0.01 Lux @(F1.2,AGC ON),0 LUX with IR 1/50(1/60)s to 1/10,000 s Lens HD Professional CS Lens 4mm.,6mm./F1.8 Lens mount CS Day/night Support IR-CUT Compression Video compression H.264 HighProfile, JPEG snapshot Bite rate 32 Kbps~8Mbps
B/W 0.01 Lux @(F1.2,AGC ON),0 LUX with IR 1/50(1/60)s to 1/10,000 s Lens HD Professional CS Lens 4mm.,6mm./F1.8 Lens mount CS Day/night Support IR-CUT Compression Video compression H.264 HighProfile, JPEG snapshot Bite rate 32 Kbps~8Mbps
Shutter 1/50(1/60)s to 1/10,000 s Lens HD Professional CS Lens 4mm.,6mm./F1.8 Lens mount CS Day/night Support IR-CUT Compression Video compression H.264 HighProfile, JPEG snapshot Bite rate 32 Kbps~8Mbps
Lens HD Professional CS Lens 4mm.,6mm./F1.8 Lens mount CS Day/night Support IR-CUT Compression Video compression H.264 HighProfile, JPEG snapshot Bite rate 32 Kbps~8Mbps
Lens mount CS Day/night Support IR-CUT Compression Video compression H.264 HighProfile, JPEG snapshot Bite rate 32 Kbps~8Mbps
Day/night Support IR-CUT Compression Video compression H.264 HighProfile, JPEG snapshot Bite rate 32 Kbps~8Mbps
Compression Video compression H.264 HighProfile, JPEG snapshot Bite rate 32 Kbps~8Mbps
Video compression H.264 HighProfile, JPEG snapshot Bite rate 32 Kbps~8Mbps
Bite rate 32 Kbps~8Mbps
<u> </u>
Audio compression G.711a
lmage
Max.image reolution 1920x1080
Frame rate 50Hz: 25fps
60Hz: 30fps
Image setting Saturation, brightness and contrast are adjustable through
IE browser or client software.
Network
Storage local SD card storage(optional),network storage
Intelligent alarm Motion detection, video loss, cable break, IP address confli
protocol TCP/IP,HTTP,DHCP,DNS,DDNS, PPPoE,SMTP,NTP
(HTTPS,SIP ,802.1x,IPv6)
Basic anti-flicker, dual-stream, heartbeat, password protection
Interface
Network inferface 1*RJ45 10M/100M adaptive ethernet port
LED 1Pc Array 30-40 Meters
Other
Working condition $-10^{\circ}\text{C} \sim 60^{\circ}\text{C}$ humidity less than 90% (non-condensing)
Power supply DC12V ±10%
Power consumption IR3 : 6W MAX;
Protection range IP66
IR distance "IR1":30-40 meters;
Dimension 200mm*92mm*75mm
Weight 940g

*ทางบริษัทของสงวนสิทธิ์ในการปรับปรุง เปลี่ยนแปลง แก้ไข โดยไม่แจ้งให้ทราบล่วงหน้า